




ARMOR

Application Scenarios : Indoor Fixed Installation / Outdoor Fixed Installation / Rental

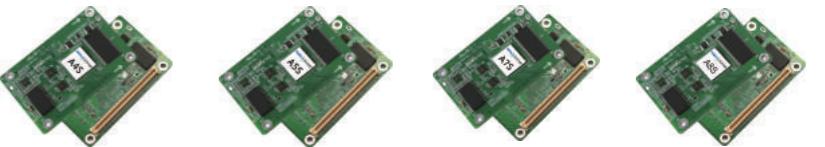

Product model	A4s	A5s	A7s	A8s
Product Orientation	Basic	Enhance	High Resolution	High Performance
Hardware Interface	High density connector	High density connector	High density connector	High density connector
Resolution	256×256	256×256	320×288	256×256
RGB data output	24 groups	32 groups	32 groups	32 groups
MOM Interface	√	√	√	√
Smart Module	√	√	√	√
Pixel level color and brightness calibration support	√	√	√	√
Receiving Card Backup Support	√	√	√	√
Power Supply Backup Support	√	√	√	√
New Features				
Firmware Backup and Read	√	√	√	√
RCFG Backup and Read	√	√	√	√
Calibration Coefficient Backup	-	√	√	√
Auto Calibration	-	√	√	√
Cabinet Monitoring LCD	√	√	√	√
90°Rotation	-	√	√	√
Mapping	-	√	√	√
Advanced Features				
Auto Screen Configuration (Need Infrared Sensor)	-	-	-	√
18bit+	-	-	-	√
Smart Gamma	-	-	-	√
ClearView	-	-	-	√
Free Rotation	-	-	-	√
Low latency	-	-	-	√
CE-EMC, Class B, RoHS	√	√	√	√